



**FILAMENT REPLACEMENT LEDs - T1**

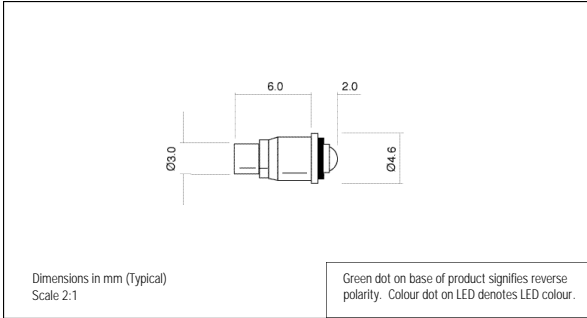

- Direct replacement for T1 MF SX3s
- Fits professional and military style push buttons
- Reverse polarity options
- Centre contact, anode as standard

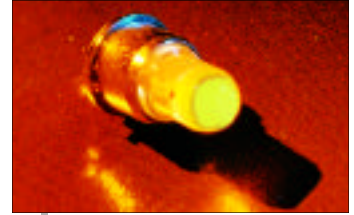

201 SERIES

MLQ = 20




**Ordering Information & Typical Technical Characteristics (Ta = 25°C)**

Mean Time Between Failure = 100,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC Vf@20mA	CURRENT DC Iopr	LUMINOUS INTENSITY Iv@20mA	WAVE LENGTH p	VIEWING ANGLE	OPERATING TEMP Topr	STORAGE TEMP Tstg
<b>HIGH INTENSITY</b>									
201-301-04-38	Red	Water Clear	1.9	20	850	660	Wide	-40 ~ +80	-40 ~ +80
201-325-04-38	Yellow		2.1	20	4400	590			
201-324-04-38	Green		3.4	20	3400	525			
201-934-04-38	Blue		3.4	20	1000	470			
201-998-04-38	White		3.4	20	2000	•			
<b>UNITS</b>			<b>Vdc</b>	<b>mA</b>	<b>mcd</b>	<b>nm</b>		<b>°C</b>	<b>°C</b>

• = Please note - Typical emission colour: x=0.31, y=0.32. Colour temperature 8000K. Intensities (Iv) and colour shades of white (x,y co-ordinates) may vary between LEDs within a batch.

*Making Light Work For You!*  
*Making Light Work For You!*  
*Making Light Work For You!*  
*Making Light Work For You!*

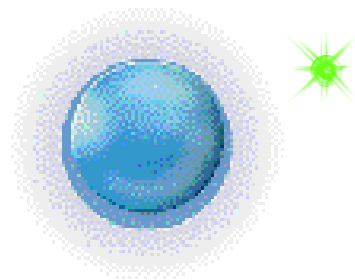

**SAMPLES AVAILABLE**