


PANEL INDICATOR LEDs - Ø 8.0mm Mounting



- Unobtrusive lens for flush mounting
- Sealed to IP40
- Supplied complete with mounting hardware

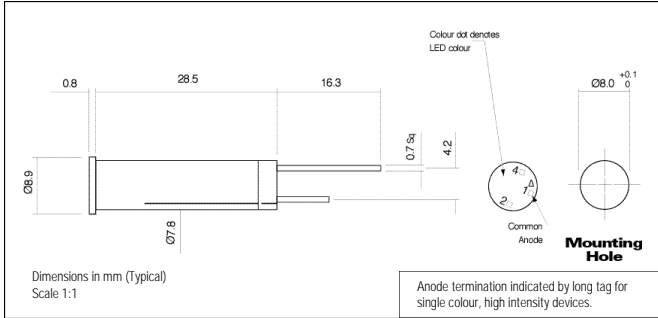

327 SERIES

MLQ = 20



Ordering Information & Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure = 90,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC Vopr	CURRENT DC Iopr	LUMINOUS INTENSITY Iv@20mA	WAVE LENGTH p	VIEWING ANGLE	OPERATING TEMP Topr	STORAGE TEMP Tstg
DUAL COLOUR HIGH INTENSITY									
327-000-22-62	Red/Red	White Diffused	24	20	850/850	660/660	Wide	0 ~ +85	0 ~ +85
327-000-22-63	Red/Yellow		24	20	850/4400	660/590			
327-000-22-61	Red/Green		24	20	850/3400	660/525			
327-000-22-64	Yellow/Green		24	20	4400/3400	590/525			
SINGLE COLOUR HIGH INTENSITY									
327-501-22	Red	Coloured Diffused	24	20	2750	660	Wide	0 ~ +85	0 ~ +85
327-521-22	Yellow		24	20	4500	590			
327-532-22	Green		24	20	6000	525			
327-930-22	Blue		24	20	2000	470			
327-997-22	White		24	20	3000	•			
UNITS			Vdc	mA	mcd	nm		°C	°C

• = Typical emission colour: x=0.31, y=0.32. Colour temperature 8000K. Intensities (Iv) and colour shades of white (x,y co-ordinates) may vary between LEDs within a batch.

Please note - There are two LEDs built into this dual colour unit allowing the colour options as detailed above. Please contact our Sales department for further details of other options available.

Making Light Work For
You! Making Light
Work For You! Making
Light Work For You! Making Light
Work For You! Making Light



FOR NEW PRODUCTS SEE OUR WEBSITE