



# Subminiature Pushbutton Switches

## Specifications:

|                        |   |
|------------------------|---|
| Contact rating:        | max. 20 V AC/DC, 0,4 VA   |
| Contact resistance:    | < 20 mΩ   |
| Insulation resistance: | > 1000 MΩ   |
| Dielectric strength:   | 1000 V, 50 Hz for the duration of 1 minute  |
| Operating temperature: | - 30° to + 85° C  |
| Mechanical life:       | minimum 50 000 operations   |
| Contacts/Terminals:    | copper alloy, gold-plated over nickel   |
| Material:              | case: nylon with glass fibre, meets UL 94 V-0, washable<br>button: polyester, meets UL 94 V-0 |
| Mounting:              | support: brass, tin-plated<br>on pc-board   |

3


**Models:** Switching functions

washable

SPDT

TSP 1 C

off - mom

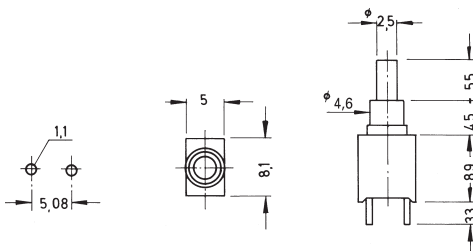

SPDT

TSP 1 C - RA

off - mom

