


PROFESSIONAL LED INDICATORS - Ø 12.7mm Mounting

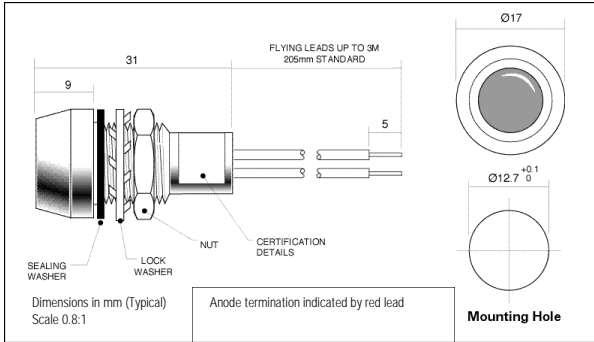

- Bright nickel plated brass housing
- BASEEFA approval to EN 50023 (EN50014) encapsulation 'M'
- Suitable for high vibration applications
- Sealed to IP67

515 SERIES

MLQ = 10

Ordering Information & Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure = 100,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC Vf@20mA	CURRENT DC Iopr	LUMINOUS INTENSITY Iv@20mA	WAVE LENGTH p	VIEWING ANGLE	OPERATING TEMP Topr	STORAGE TEMP Tstg
HIGH INTENSITY									
515-501-04	Red	Water Clear	2.6	20	2750	660	Wide	-20 ~ +70	-30 ~ +85
515-521-04	Yellow		2.8	20	4500	590			
515-532-04	Green		4.1	20	6000	525			
515-930-04	Blue		4.1	20	2000	470			
515-997-04	White		4.1	20	3000	•			
UNITS			Vdc	mA	mcd	nm		°C	°C

• = Typical emission colour: x=0.31, y=0.32. Colour temperature 8000K. Intensities (Iv) and colour shades of white (x,y co-ordinates) may vary between LEDs within a batch.

Making Light Work For You!
Making Light Work For You!
Making Light Work For You!
Making Light Work For You!

FOR NEW PRODUCTS SEE OUR WEBSITE