


● PROFESSIONAL LED INDICATORS - Ø 6.35mm Mounting



- Black anodised aluminium housing
- Unique rear mounting indicator
- Includes blue light source for NVG compatibility
- Sealed to IP67

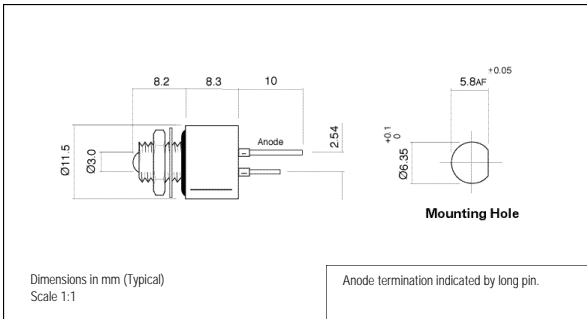

684 SERIES

MLQ = 10




Ordering Information & Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure = 100,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC Vf@20mA	CURRENT DC Iopr	LUMINOUS INTENSITY Iv@20mA	WAVE LENGTH p	VIEWING ANGLE	OPERATING TEMP Topr	STORAGE TEMP Tstg
<b>HIGH INTENSITY</b>									
684-301-04	Red	Water Clear	1.9	20	850	660	Wide	-30 ~ +85	-30 ~ +85
684-325-04	Yellow		2.1	20	4400	590			
684-324-04	Green		3.4	20	3400	525			
684-934-04	Blue		3.4	20	1000	470			
684-998-04	White		3.4	20	2000	•			
<b>UNITS</b>			<b>Vdc</b>	<b>mA</b>	<b>mcd</b>	<b>nm</b>		<b>°C</b>	<b>°C</b>

• = Typical emission colour: x=0.31, y=0.32. Colour temperature 8000K. Intensities (Iv) and colour shades of white (x,y co-ordinates) may vary between LEDs within a batch.

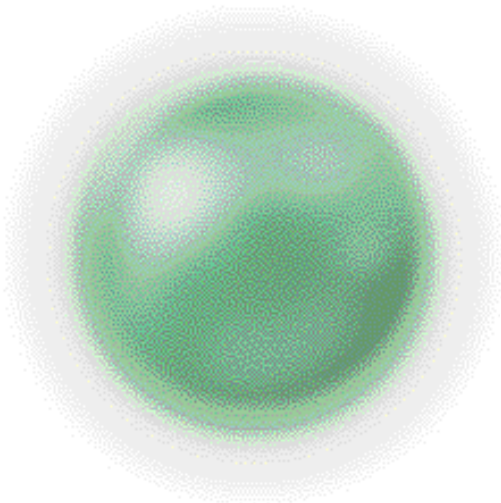

*Making Light Work For You! Making Light Work For You! Making Light Work For You! Making Light Work For You! Making Light*

● CUSTOM DESIGN SERVICE

