




AK-206-N-SSB-WP-MM



AK-206-A-SSB-WP-MM

STANDARD MATRIX CIRCUIT DIAGRAM




AK-206

OUTPUT ARRANGEMENT	
OUTPUT PIN NO.	SYMBOL
1	ROW 1
2	ROW 2
3	ROW 3
4	ROW 4
5	ROW 5
6	ROW 6
7	COL 2
8	COL 1

GENERAL SPECIFICATION

- Contact rating: 20mA, 24VDC
- Contact resistance: 200 ohm max
- Life: 2,000,000 cycles per key
- Operating Temperature: -20°C to +60°C
- Storage Temperature: -40°C to +65°C

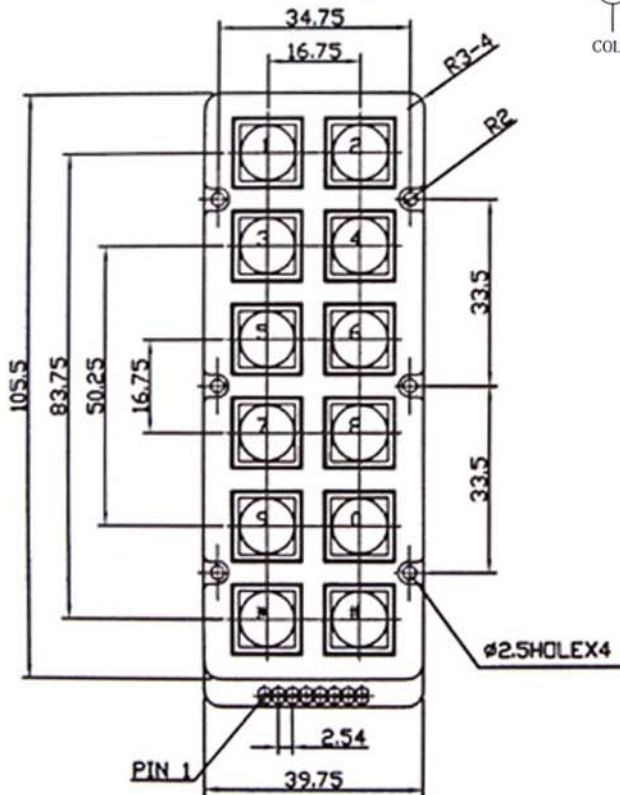

ACTUATING FORCE : 150±30 GRAMS
STROKE : 2.0±0.5mm.