


# Coded Switches Type C07A


- 16 position coded output
- >10'000 switching cycles
- only 11,5mm body height
- up to 3,5 Ncm torque
- spray proof IP 64 (higher on request)
- reflowable on request
- steel spindle-shaft



## Horizontal for panel mounting

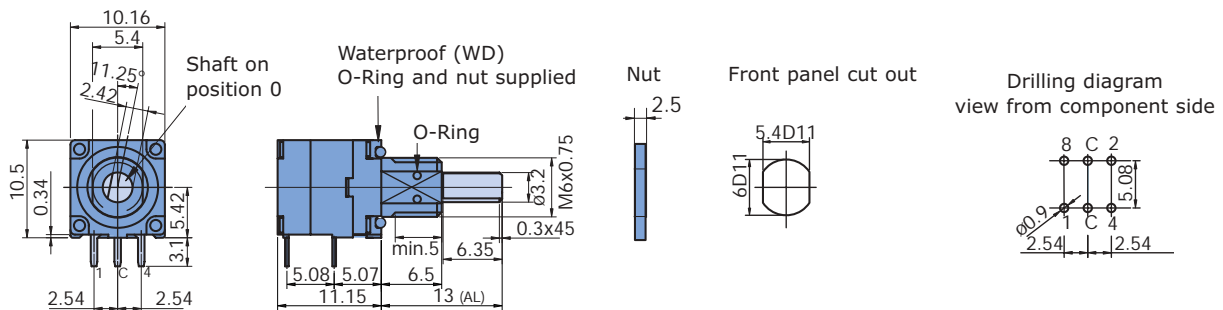

## Vertical for panel mounting

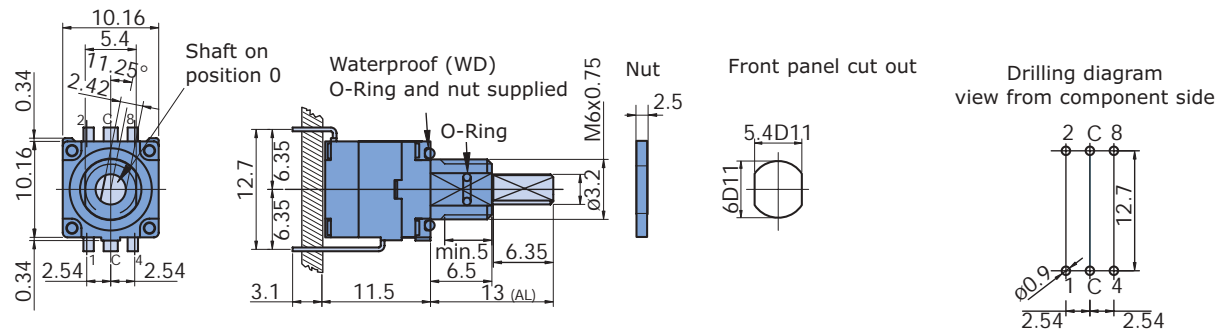

## Horizontal with spindle-shaft

Coding	Switching function	Position (with end stop)	Indexing angle	Panel mounting and waterproof
HEX	shorting	16 (0-F)	22,5°	C07A1153-300000
	non-shorting	16 (0-F)	22,5°	C07A1154-300000
HEX compl.	shorting	16 (0-F)	22,5°	C07A1163-300000
Gray code	shorting	16 (0-F)	22,5°	C07A1173-300000

O-Ring and nut supplied

packing unit : 50 pieces

## Vertical with spindle-shaft

Coding	Switching function	Position (with end stop)	Indexing angle	Panel mounting and waterproof
HEX	shorting	16 (0-F)	22,5°	C07A3153-300000
	non-shorting	16 (0-F)	22,5°	C07A3154-300000
HEX compl.	shorting	16 (0-F)	22,5°	C07A3163-300000
Gray code	shorting	16 (0-F)	22,5°	C07A3173-300000

O-Ring and nut supplied

packing unit : 50 pieces

1 mm = 0.04 inch, 1 inch = 25.4 mm

Technical Data and Modified Versions see page 64-66  
Items available from stock!