


## TYPICAL INDICATOR ORDERING EXAMPLE



### DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

#### JF01PC

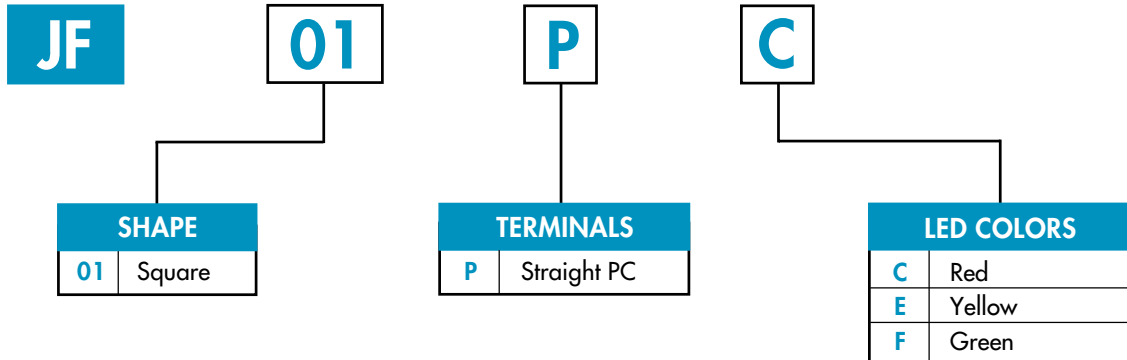

## LED COLORS & SPECIFICATIONS

<p>LED is an integral part of the indicator and not available separately.</p> <p>LED polarity markings are on the bottom of the indicator.</p> <p>The electrical specifications shown are determined at a basic temperature of 25°C.</p> <p>If the source voltage exceeds the rated voltage, a ballast resistor is required.</p> <p>The resistor value can be calculated by using the formula in the Supplement; see Supplement Index (page Z1).</p>	Color:	<b>C</b> Red	<b>E</b> Yellow	<b>F</b> Green
	Forward Peak Current $I_{FM}$	30mA	30mA	30mA
	Continuous Forward Current $I_F$	20mA	20mA	20mA
	Forward Voltage $V_F$	1.85V	2.1V	2.15V
	Reverse Peak Voltage $V_{RM}$	4V	4V	4V
	Current Reduction Rate Above 25°C $\Delta I_F$	0.4mA/°C	0.4mA/°C	0.4mA/°C

## TYPICAL INDICATOR DIMENSIONS

