



unimec 1P/1Q/1R

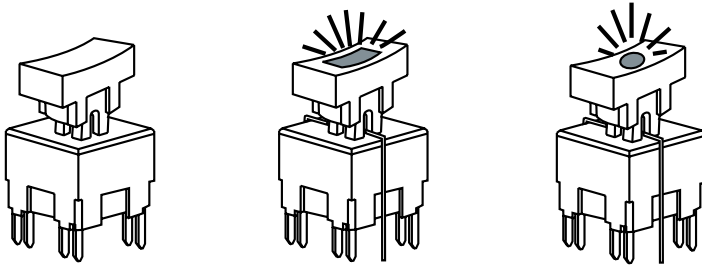


Technical Data:

- Max. 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:
low temp: -40/+75°C
high temp: -40/+160°C
- through-hole only


Dimensions

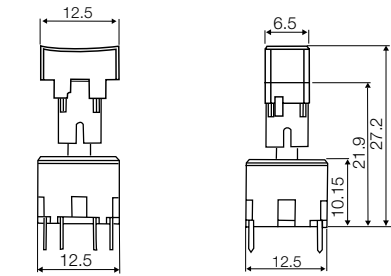


PCB layout

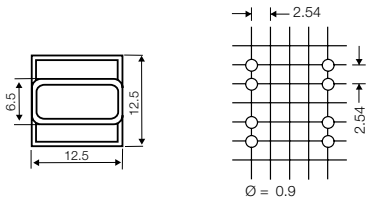


Dimensions w/LED

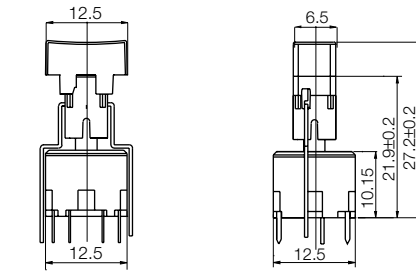


PCB layout
(solder side)

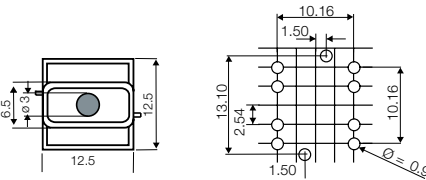



Dimensions w/LED

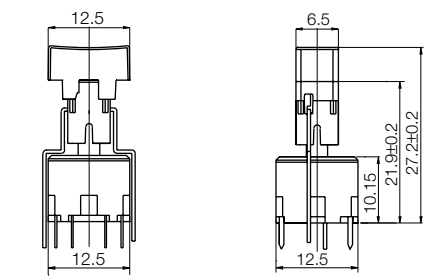







PCB layout
(solder side)

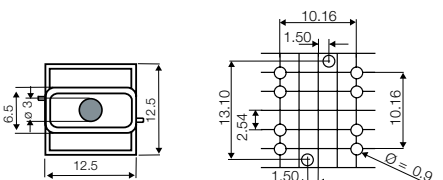

HOW TO ORDER

| | | | | | |
|----------------------------|---|-------------------------------------------------------------------------------------|---|-------------------------------------------------------------------------------------|-----------------|
| 1 5 | + | 1 6 2 5 0 | + | 1 P | |
| Switch | | Extender | | Cap | 00 blue |
| 15501 mom. silver | |  | |  | 03 grey |
| 15551 alt. silver | | | | | 08 red |
| 15502 mom. gold | | | | | 09 black |
| 15552 alt. gold | | | | | |
| 15500 silent silver | | | | | |
| 15401 mom. silver | | | | | |
| high temp. | | | | | |
| 15451 alt. silver | | | | | |
| high temp. | | | | | |



| | | | | | | | | |
|-------------------------------------------------------------------------------------|---|-------------------------------------------------------------------------------------|---|-------------------------------------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------|--------------------------|----------------|
| 1 5 | + | 1 6 2 5 0 | + | 1 Q | Lens | + | 1 6 9 2 3 | LED |
| 15501 mom. silver | | 16250 extender | | 1Q | 1 transparent | | 16923 | 00 blue |
|  | |  | |  | |  | 20 green | |
| | | | | 1R | | | 40 yellow | |
| | | | |  | | | 80 red | |
| | | | | | | | 2040 green/yellow | |
| | | | | | | | 8020 red/green | |
| | | | | | | | 8040 red/yellow | |

Ordering example: 15501 + 16250 + 1R031 + 1692380