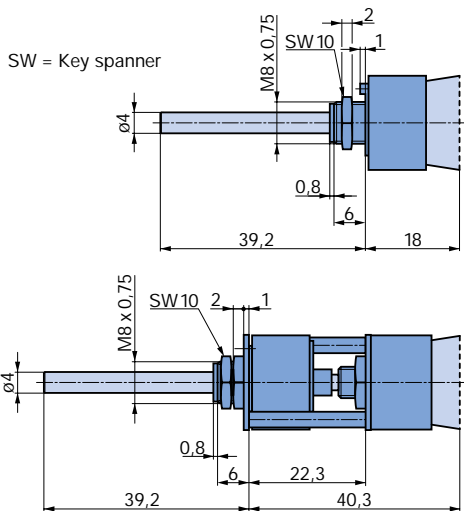


# Rotary Switches Type 01

- 12 position switch
- life expectancy > 25 000 switching cycles
- steel spindle-shaft and metal bush for rugged applications
- modular system allows easy adaptation of standard products
- gold flash contact standard




## With solder eyelets



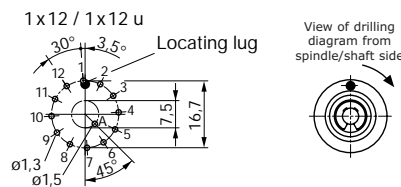
Front panel cut out



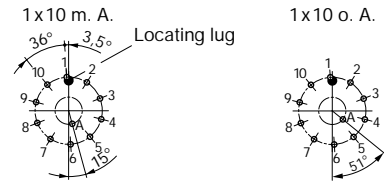
## With solder pins for PCB mounting



Drilling diagram for indexing angle 30°




Drilling diagram for indexing 36°



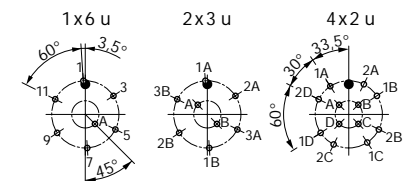
## Possible modifications on request

- special type of shaft (length, diameter, form)
- special torque
- waterproof
- special end stop
- shortened bush
- hollow shaft/inner shaft











1x11 / 1x11 u    2x6 / 2x6 u    4x3 / 4x3 u



Drilling diagram for indexing angle 60°




### Indexing angle 30°, shorting

Contact arrangement	Construction	Function (Pole x Position)	with solder eyelets		with pins for PCB	
			gold flash	gold 3 µm	gold flash	gold 3 µm
		1 x 12 o.A.	01-1120	01-1123	01-1120-20	01-1123-20
		2 x 12 o.A.	01-2120	01-2123	-	-
		1 x 12	01-1180	01-1183	01-1180-20	01-1183-20
		2 x 12	01-2180	01-2183	-	-
		1 x 11	01-1110	01-1113	01-1110-20	01-1113-20
		2 x 11	01-2110	01-2113	-	-
		2 x 6	01-1260	01-1263	01-1260-20	01-1263-20
		4 x 6	01-2260	01-2263	-	-
		4 x 3	01-1430	01-1433	01-1430-20	01-1433-20
		8 x 3	01-2430	01-2433	-	-

packing unit : 10 pieces




### Indexing angle 30°, non-shorting


Contact arrangement	Construction	Function (Pole x Position)	with solder eyelets		with pins for PCB	
			gold flash	gold 3 µm	gold flash	gold 3 µm
		1 x 12 u.o.A.	01-1121	01-1124	01-1121-20	01-1124-20
		1 x 12 u.	01-1181	01-1184	01-1181-20	01-1184-20
		1 x 11 u.	01-1111	01-1114	01-1111-20	01-1114-20
		2 x 6 u.	01-1261	01-1264	01-1261-20	01-1264-20
		4 x 3 u.	01-1431	01-1434	01-1431-20	01-1434-20

 available on request

packing unit : 10 pieces


### Indexing angle 36°, shorting

Contact arrangement	Construction	Function (Pole x Position)	with solder eyelets		with pins for PCB	
			gold flash	gold 3 µm	gold flash	gold 3 µm
		1 x 10 o.A.	01-1100	01-1103	01-1100-20	01-1103-20
		1 x 10	01-1190	01-1193	01-1190-20	01-1193-20

 available on request

packing unit : 10 pieces

### Indexing angle 60°, non-shorting

Contact arrangement	Construction	Function (Pole x Position)	with solder eyelets		with pins for PCB	
			gold flash	gold 3 µm	gold flash	gold 3 µm
		1 x 6 u. o.A.	01-1101	01-1104	01-1101-20	01-1104-20
		1 x 6 u.	01-1161	01-1164	01-1161-20	01-1164-20
		2 x 3 u.	01-1231	01-1234	01-1231-20	01-1234-20
		4 x 2 u.	01-1421	01-1424	01-1421-20	01-1424-20

 available on request

packing unit : 10 pieces

### Stop pins

Packing unit	Order Number
10 pieces	4007-36
50 pieces	4007-35

 Contact arrangement from the spindle side  
 u. = non-shorting, o.A. = without end stop, can **not** be adjusted subsequently!

Items available from stock!