



unimec 1K + 2K

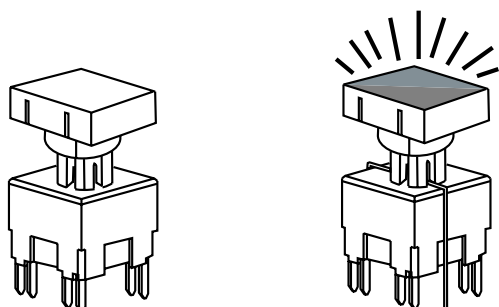


Technical Data:

- Max. 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:
low temp: -40/+75°C
high temp: -40/+160°C
- through-hole only


Dimensions (through-hole)

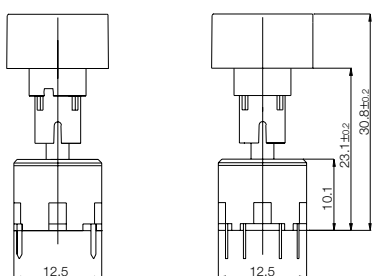


PCB layout

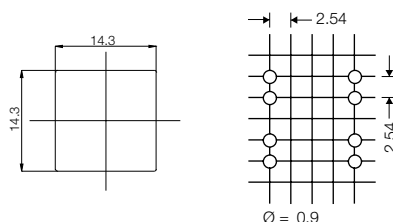



Dimensions (w/LED)

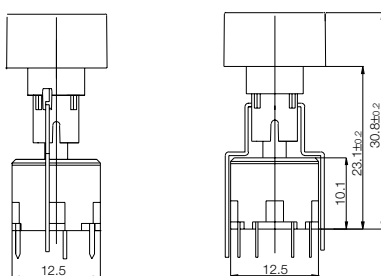





PCB layout (solder side)


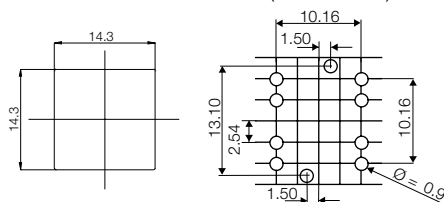



Dimensions with Bezel

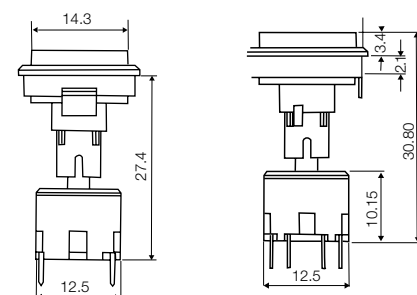

HOW TO ORDER

	1 5	+	1 6 2 5 0	+	1 K	1 6	+	2 K	
	Switch		Extender		Cap	00 blue 02 green 03 grey 04 yellow 06 white 08 red 09 black		Bezel	03 grey 06 white 08 red 09 black
	15501 mom. silver								
	15551 alt. silver								
	15502 mom. gold								
	15552 alt. gold								
	15500 silent silver								
	15401 mom. silver high temp.								
	15451 alt. silver high temp.								
									(Optional)

	1 5	+	1 6 2 5 0	+	1 K 1 1 1 6	+	1 6 9 2 4	+	2 K
					Cap transparent	LED	22 green 44 yellow 88 red		Bezel
									03 grey 06 white 08 red 09 black
									(Optional)

Ordering example: 15501 + 16250 + 1K1116 + 1692488 + 2K08