



unimec 16324 - 16326

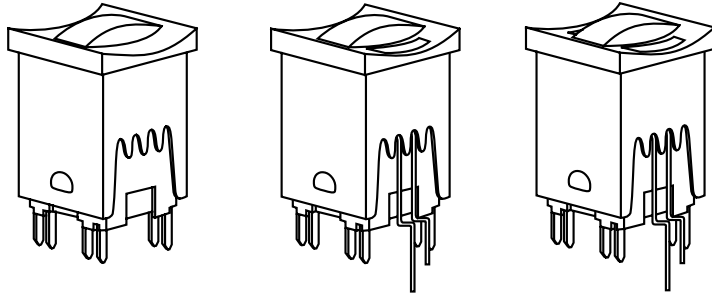


Technical Data:

- Max. 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:
low temp: -40/+75°C
high temp: -40/+160°C
- through-hole only


Dimensions

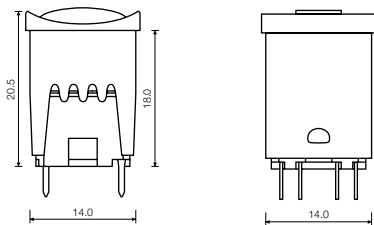


Dimensions w/LED

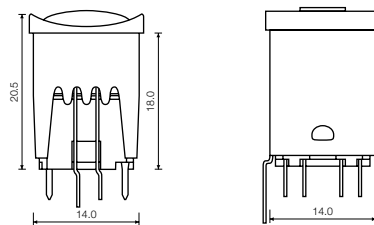


Dimensions w/2 LEDs

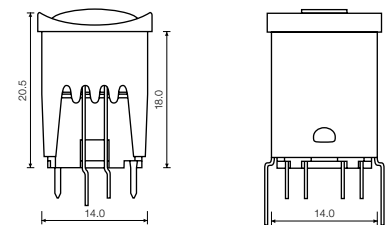


PCB layout

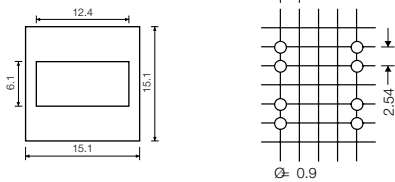

PCB layout (solder side)

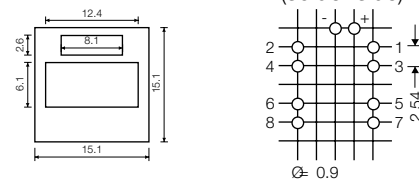

PCB layout (solder side)

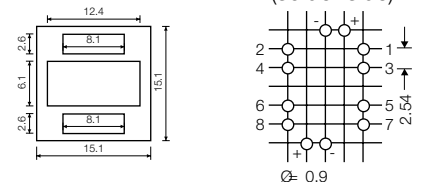

HOW TO ORDER

1 5 + 1 6 2 7 0 + 1 6 3 0 0 + 1 6 3 2 4



Switch

- 15501 mom. silver
- 15551 alt. silver
- 15502 mom. gold
- 15552 alt. gold
- 15500 silent silver
- 15401 mom. silver high temp.
- 15451 alt. silver high temp.



Extender



- 00 blue
- 01 brown
- 02 green
- 03 grey
- 04 yellow
- 05 golden
- 06 white
- 07 orange
- 08 red
- 09 black



Bezel

- 01 brown
- 03 grey
- 06 white
- 09 black




1 5 + 1 6 2 7 0 + 1 6 3 0 0 + 1 6 3 2 7 + 1 6 9 2 2

Switch

Extender

Cap



16325



16326



- Lens 02 green
- 04 yellow
- 08 red

Lens 16327

2 required



- LED 02 green
- 04 yellow
- 08 red

LED 16922

2 required

Ordering example: 15501 + 16270 + 1630008 + 1632509 + 1632708 + 1692208