


multimec® 3C/3E




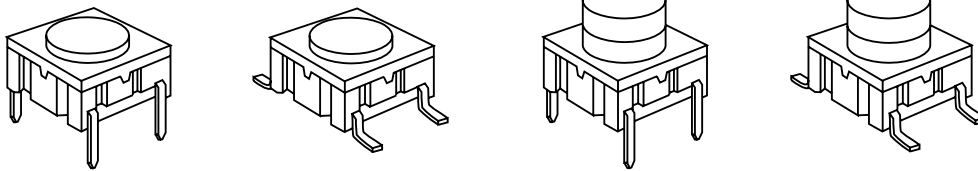


Technical Data:




- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
low temp: -40/+115°C
high temp: -40/+160°C

STANDARD 3C


Dimensions (Through-hole)



PCB layout







PCB layout






VARIABLE HEIGHTS 3E


Dimensions (Through-hole)



PCB layout



PCB layout



HOW TO ORDER

3 C

Switch

Mounting

T through-hole
S surface mount

L 6 low temp.
H 9 high temp.

Optional actuator colour available for low temp. version only:
L 9 black

Standard versions:

3CTL6
3CTL9
3CTH9
3CSH9
3CSH9R (tape/reel)

3 E

Switch

Mounting

T through-hole
S surface mount

L 9 low temp.
H 9 high temp.

Standard overall height

08.0
09.5
10.4
11.0
12.0
15.0

Standard versions:

3ETL9 - 11.0
3ETH9 - 11.0
3ESH9 - 11.0
3ESH9R

Custom heights:

3E is available in any height from 08.0 to 15.0 mm.
Min. order qty. for custom heights is 2.000 pcs. / A start-up charge will apply.

Ordering example: 3CTL6 and 3ETL9 - 09.5