

## Series CK

## High Security Keylocks



### CK Series .....F3

16mm & 19mm High Security  
3A Power Level  
Solder Lug  
Bushing Mount



### SK Series .....F9

12mm Low & Medium Security  
3A & 1A Power Level  
Solder Lug  
Bushing Mount



### SK Series .....F15

Antistatic Process Sealed Subminiature  
0.4VA Logic Level  
Straight & Right Angle PC  
PCB Mount



### SK Series .....F19

Process Sealed  
0.4VA Logic Level  
Straight & Right Angle PC  
PCB Mount



### SK Series .....F25

Antistatic Snap-in  
0.4VA Logic Level  
Solder Lug  
Snap-in Mount

## High Security Keylocks

## Series CK

## General Specifications

## Electrical Capacity (Resistive Load)

Power Level: 3A @ 250V AC

## Other Ratings

<b>Contact Resistance:</b>	20 milliohms maximum
<b>Insulation Resistance:</b>	1,000 megohms minimum @ 500V DC
<b>Dielectric Strength:</b>	1,000V AC minimum between contacts for 1 minute minimum; 1,500V AC minimum between contacts & case for 1 minute minimum
<b>Mechanical Life:</b>	30,000 cycles minimum
<b>Electrical Life:</b>	10,000 cycles minimum
<b>Static Capability:</b>	Withstands 15 kilovolts minimum ESD minimum (for CKM models only)
<b>Nominal Operating Torque:</b>	16mm Bushing (CKM models): .04 mNm (5.67 oz•in) for Flat Key .08 mNm (11.33 oz•in) for Tubular Key 19mm Bushing (CKL models): .05 mNm (7.08 oz•in) for Flat Key .07 mNm (9.91 oz•in) for Tubular Key
<b>Contact Timing:</b>	Break-before-make
<b>Angle of Throw:</b>	90° for 2-position & 45° for 3-position

## Materials &amp; Finishes

<b>Keys for CKM:</b>	Brass with nickel plating with ABS handle
<b>Keys for CKL:</b>	Brass with nickel plating for tubular key; brass with chrome plating for flat key
<b>Housing/Bushing:</b>	Glass fiber reinforced PBT for CKM models; zinc alloy with chrome plating for CKL
<b>Base:</b>	LCP (Liquid Crystal Polymer)
<b>Contact Terminals:</b>	Copper with silver plating
<b>Common Terminals:</b>	Copper with silver plating
<b>Movable Contactor:</b>	Copper
<b>Movable Contacts:</b>	Silver

## Environmental Data

<b>Operating Temperature Range:</b>	-25°C through +70°C (-13°F through +158°F)
<b>Humidity:</b>	90 ~ 95% humidity for 240 hours @ 40°C (104°F) for CKM; 90 ~ 95% humidity for 96 hours @ 40°C (104°F) for CKL
<b>Vibration:</b>	10 ~ 55Hz with peak-to-peak amplitude of 1.5mm for CKM or 0.7mm for CKL traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
<b>Shock:</b>	50G (490m/s <sup>2</sup> ) acceleration for CKM; 30G (294m/s <sup>2</sup> ) acceleration for CKL; (CKM & CKL tested in 6 right angled directions, with 5 shocks in each direction)

## Installation

<b>Mounting Torque:</b>	1.5 Nm (13.28 lb•in) maximum
<b>Soldering Time &amp; Temperature:</b>	Manual Soldering: See Profile A in Supplement section.

## Series CK

## High Security Keylocks

# Distinctive Characteristics

High insulating material for 16mm CKM models withstands over 15 kilovolts of electrostatic discharge, thus providing antistatic feature.

Rugged, die cast housing 19mm CKL models designed for higher security requirements.

Vertically rotating switching mechanism combines with self-cleaning sliding contacts for high reliability and long operating life.

16mm and 19mm diameter bushings available.


CKL and CKM on-off-on models with tubular keys have push-and-lock mechanism which allows contactor to drop and slide over stationary contacts.

Available in both flat and tubular key styles; flat key is reversible for easier setting.


Epoxy sealed terminals prevent entry of flux and other contaminants.

Interior construction provides seal for contact area.

High dielectric strength of 1,500 volts between contacts and case.

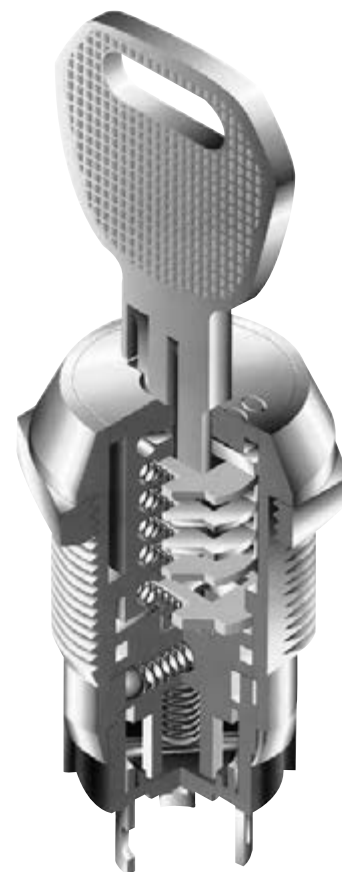

Actual Size CKM with Tubular Key

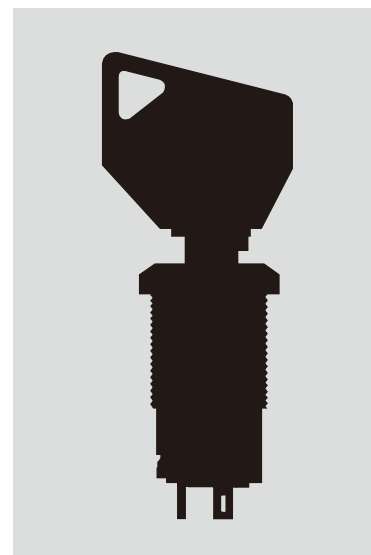

# Series CK

## High Security Keylocks

### POLES, CIRCUITS & KEY-REMOVABLE POSITIONS

Pole & Throw	Model	Key Positions			Connected Terminals (Terminal numbers are on switch)			Schematic	◎ = Key Removable • = Not Removable ✓ = Maximum Arc
		Pos 1	Pos 2	Pos 3	Pos 1	Pos 2	Pos 3		
SPDT	CKM12A CKL12A	ON	NONE	ON	COM-1	—	COM-2		
SPDT	CKM12B CKL12B	ON	NONE	ON	COM-1	—	COM-2		
SPDT	CKM13E CKL13E	ON	OFF	ON	COM-1	OPEN	COM-2		

### KEYS



#### Flat Key

##### AT4147 for CKM 16mm

Brass with Nickel Plating key base & ABS key handle


##### AT4153 for CKL 19mm

Brass with Chrome Plating (crosshatch texture on handle)

One key provided with each switch (no master key available)  
For ordering additional keys, indicate the same key number that is engraved on the face of your switch.

Randomly assigned key number (001 through 010 for CKM models & 001 through 025 for CKL models).

Typical Key Ordering Example: AT4153-001

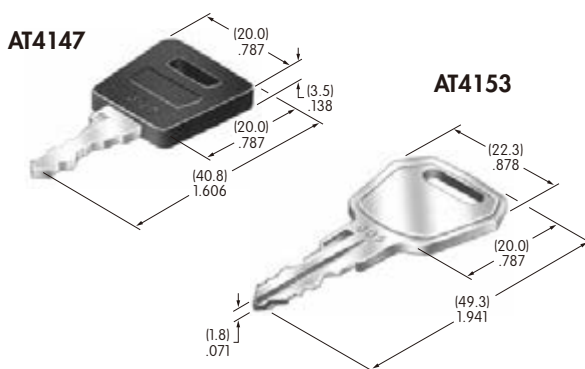

#### Tubular Key

(must be pressed inward to actuate)

##### AT4146 for CKM 16mm

Brass with Nickel Plating key base & ABS key handle


##### AT4152 for CKL 19mm

Brass with Nickel Plating (smooth)

One key provided with each switch (no master key available)  
For ordering additional keys, indicate the same key number that is engraved on the face of your switch.

Randomly assigned key number (001 through 025 for CKM models & 001 through 050 for CKL models).

Typical Key Ordering Example: AT4146-001

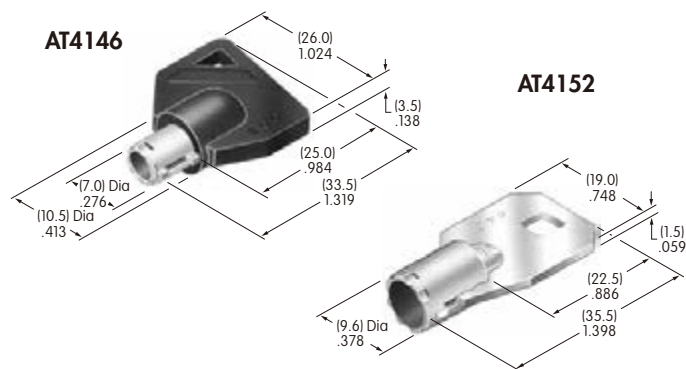

### CONTACT MATERIALS, RATINGS & TERMINALS




Silver over Silver  
Power Level 3A @ 250V AC




Solder Lug Terminals

Solder Lug Terminal  
for CKM



Solder Lug Terminal  
for CKL




## Series CK


## High Security Keylocks

### Distinctive Characteristics

- High insulating material for 16mm CKM models withstands over 15 kilovolts of electrostatic discharge, thus providing antistatic feature.
- Rugged, die cast housing 19mm CKL models designed for higher security requirements.
- Vertically rotating switching mechanism combines with self-cleaning sliding contacts for high reliability and long operating life.
- 16mm and 19mm diameter bushings available.
- CKL and CKM on-off-on models with tubular keys have push-and-lock mechanism which allows contactor to drop and slide over stationary contacts.
- Available in both flat and tubular key styles; flat key is reversible for easier setting.
- Epoxy sealed terminals prevent entry of flux and other contaminants.
- Interior construction provides seal for contact area.
- High dielectric strength of 1,500 volts between contacts and case.

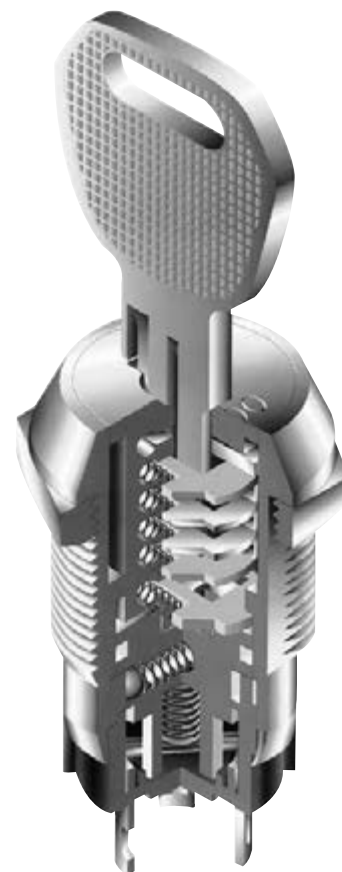

Actual Size CKM with Tubular Key

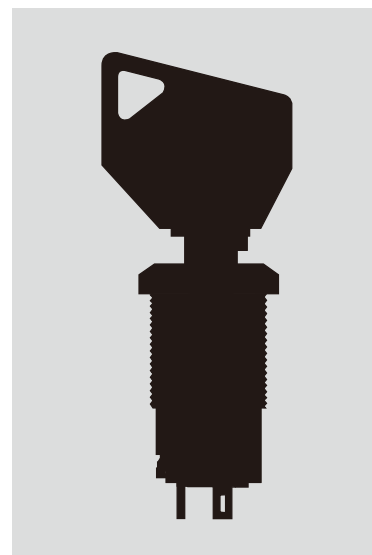




# High Security Keylocks

## Series CK

### TYPICAL SWITCH DIMENSIONS




#### 16mm Bushing • Flat Key

90°  
Angular  
Throw

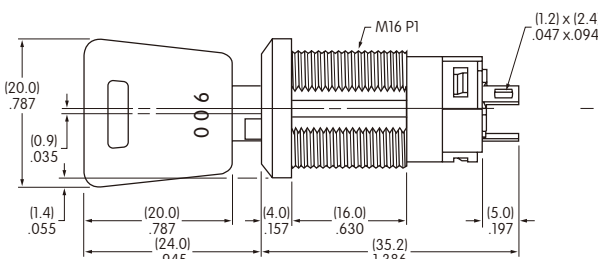




CKM12AFW01

45°  
Angular  
Throw

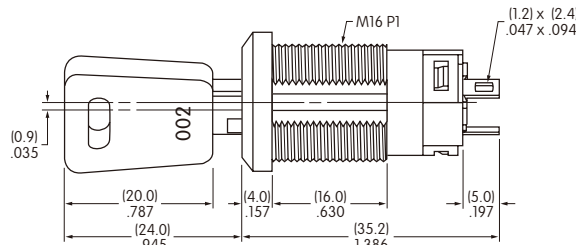




#### 16mm Bushing • Tubular Key

90°  
Angular  
Throw

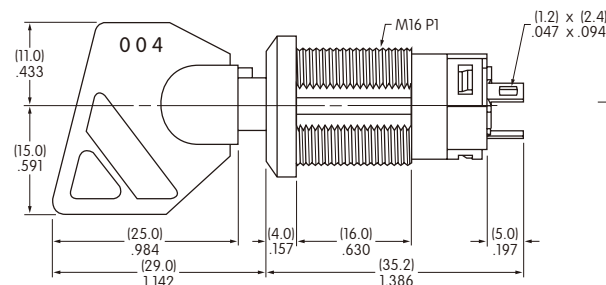


CKM13ETW01

45°  
Angular  
Throw

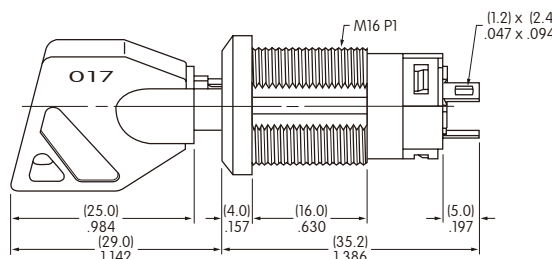


### PANEL CUTOUT & STANDARD HARDWARE FOR 16MM BUSHING

Maximum Effective  
Panel Thickness:  
.469" (11.9mm)



AT016  
16mm Hex Mounting Nut  
for CKM

1 included with each switch  
Steel with nickel plating



# Series CK



## High Security Keylocks

### TYPICAL SWITCH DIMENSIONS



#### 19mm Bushing • Flat Key



**90°  
Angular  
Throw**

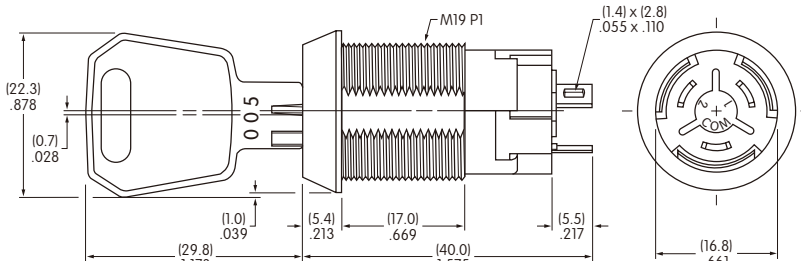

**45°  
Angular  
Throw**

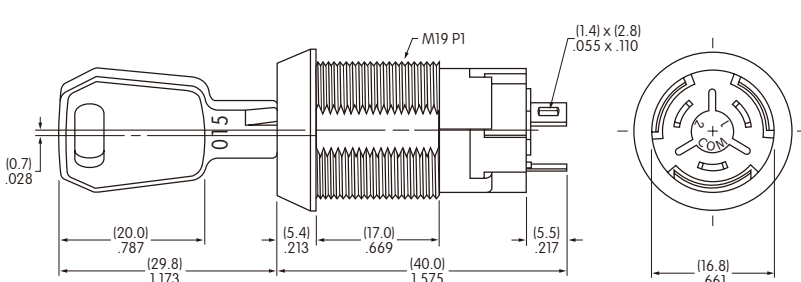



CKL12AFW01



#### 19mm Bushing • Tubular Key



**90°  
Angular  
Throw**

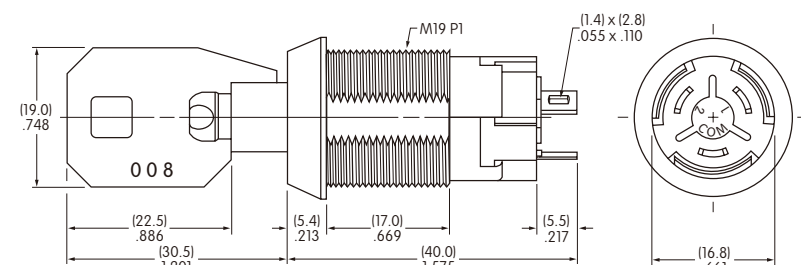


**45°  
Angular  
Throw**

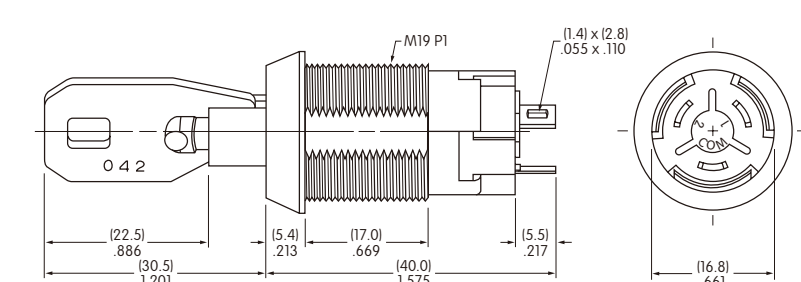

CKL13ETW01

### PANEL CUTOUT & STANDARD HARDWARE FOR 19MM BUSHING

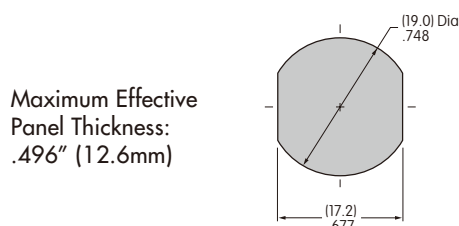

#### AT019 19mm Hex Mounting Nut for CKL

1 included with each switch  
Steel with nickel plating

