

SK | SKZ


EMC Shield brackets

RoHS
compliant

Made in
Germany



Dimensions SK bracket (without mounting foot):

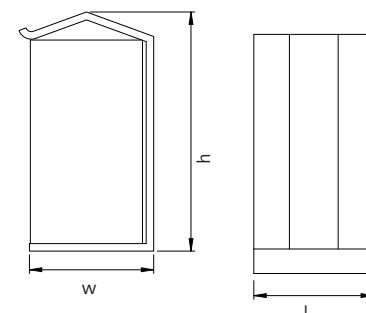

Product description

SK shield brackets can be used where the shield of single cables has to be earthed.

SK shield brackets can be assembled on a mounting plate with screws, with SC-feet in DIN-rails shape C or with SF-feet on 35 mm DIN-rails shape H.

Advantages & benefits

- Simple assembly on TS35 DIN rails and 10 x 3 mm bus bars
- Various sizes and possibilities for mounting

4.1



SC foot single for C-rail*
(PU: 10) Order No. 36220



SC-foot: space-saving design enables high cable density.

Mounting foot adjusts itself when tightening the screw.

NEW

Specifications










Material

SK-bracket	Sheet steel, galvanically zinc plated
SC-foot	Sheet steel, galvanically zinc plated
SF-foot	Spring steel

Accessories

Bus bar 10 x 3

143

Description	Type	Shield diameter	Dimensions l x w x h [mm]	PU
For direct mounting (M4-screw included):				
 NEW	SKZ 3-8	3 - 8 mm	30.5 x 12.8 x 31.8	10
 NEW	SKZ 4-13.5	4 - 13.5 mm	36 x 22 x 37.8	10
	SK 10-20	10 - 20 mm	27 x 25 x 41	10
	SK 15-32	15 - 32 mm	32 x 37 x 64	10
For 35 mm DIN-rail shape H:				
 NEW	SF SKZ 3-8	3 - 8 mm	30.5 x 12.8 x 31.8	10
 NEW	SF SKZ 4-13.5	4 - 13.5 mm	36 x 22 x 37.8	10
	SF SK 10-20	10 - 20 mm	27 x 25 x 41	10
	SF SK 15-32	15 - 32 mm	32 x 37 x 64	10
For 10 x 3 mm bus bar:				
 NEW	SS SKZ 3-8	3 - 8 mm	30.5 x 12.8 x 31.8	10
 NEW	SS SKZ 4-13.5	4 - 13.5 mm	36 x 22 x 37.8	10
	SS SK 10-20	10 - 20 mm	27 x 25 x 41	10
	SS SK 15-32	15 - 32 mm	32 x 37 x 64	10
For DIN-rail shape C (width of mouth: 16 mm):				
 NEW	SC SKZ 3-8	3 - 8 mm	30.5 x 12.8 x 31.8	10
 NEW	SC SKZ 4-13.5	4 - 13.5 mm	36 x 22 x 37.8	10
	SC SK 10-20	10 - 20 mm	27 x 25 x 41	10
	SC SK 15-32	15 - 32 mm	32 x 37 x 64	10