


Coded Switches Type 07


- 10/16 position coded output
- >10'000 switching cycles
- up to 3,5 Ncm torque
- small and rugged
- steel spindle-shaft
- sealable up to IP 68 (2bar)
- reflow version available




Horizontal

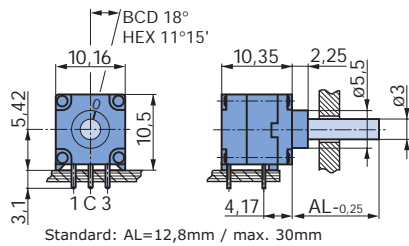

Front panel operation

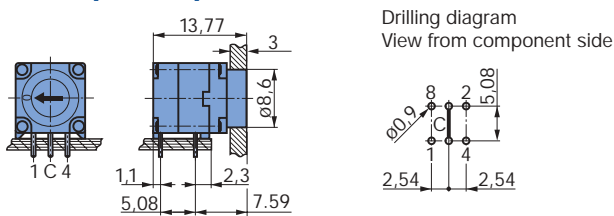


Horizontal for panel mounting

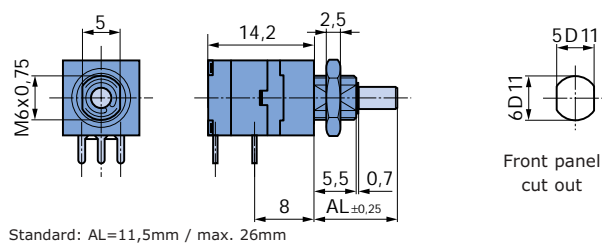


Standard: AL=11,5mm / max. 26mm

Waterproof (WD)
O-Ring and nut supplied


Vertical

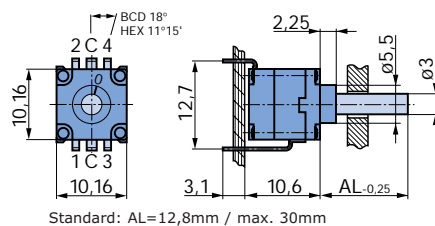

Drilling diagram
View from component side



Vertical for panel mounting

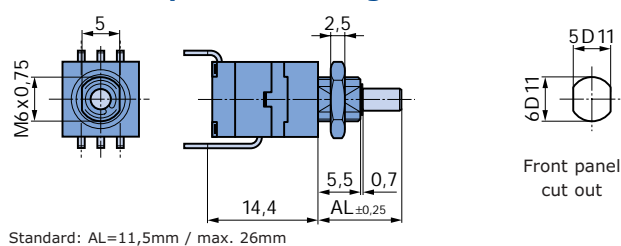


Standard: AL=11,5mm / max. 26mm

Possible modifications on request

- special type of shaft (length, form)
- special torque
- panel mounting
- waterproof
- different number of positions (internal stop)
- anti-static packaging
- shortened bush
- tape & reel packaging

Type 07 Horizontal


With spindle-shaft



Coding	Switching function	Position	Indexing angle	with end stop	endless rotating
BCD	shorting	10 (0-9)	36°	07-1133	07-1033
	non-shorting	10 (0-9)	36°	07-1134	07-1034
BCD compl.	shorting	10 (0-9)	36°	07-1143	07-1043
HEX	shorting	16 (0-F)	22,5°	07-1153	07-1053
	non-shorting	16 (0-F)	22,5°	07-1154	07-1054
HEX compl.	shorting	16 (0-F)	22,5°	07-1163	07-1063
Gray code	shorting	16 (0-F)	22,5°	07-1173	07-1073

packing unit : 50 pieces

With spindle-shaft /with end stop / panel mounting / waterproof IP 68/2bar




Coding	Switching function	Position	Indexing angle	with end stop
BCD	shorting	10 (0-9)	36°	07-1133-300000
	non-shorting	10 (0-9)	36°	07-1134-300000
BCD compl.	shorting	10 (0-9)	36°	07-1143-300000
HEX	shorting	16 (0-F)	22,5°	07-1153-300000
	non-shorting	16 (0-F)	22,5°	07-1154-300000
HEX compl.	shorting	16 (0-F)	22,5°	07-1163-300000
Gray code	shorting	16 (0-F)	22,5°	07-1173-300000

O-Ring and nut supplied

packing unit : 50 pieces

With spindle-shaft / endless rotating / panel mounting / waterproof IP 68/2bar




Coding	Switching function	Position	Indexing angle	endless rotating
BCD	shorting	10 (0-9)	36°	07-1033-300000
	non-shorting	10 (0-9)	36°	07-1034-300000
BCD compl.	shorting	10 (0-9)	36°	07-1043-300000
HEX	shorting	16 (0-F)	22,5°	07-1053-300000
	non-shorting	16 (0-F)	22,5°	07-1054-300000
HEX compl.	shorting	16 (0-F)	22,5°	07-1063-300000
Gray code	shorting	16 (0-F)	22,5°	07-1073-300000

O-Ring and nut supplied

packing unit : 50 pieces


Screwdriver actuation



Coding	Switching function	Position	Indexing angle	with end stop	endless rotating
BCD	shorting	10 (0-9)	36°	07-0133	07-0033
	non-shorting	10 (0-9)	36°	07-0134	07-0034
BCD compl.	shorting	10 (0-9)	36°	07-0143	07-0043
HEX	shorting	16 (0-F)	22,5°	07-0153	07-0053
	non-shorting	16 (0-F)	22,5°	07-0154	07-0054
HEX compl.	shorting	16 (0-F)	22,5°	07-0163	07-0063
Gray code	shorting	16 (0-F)	22,5°	07-0173	07-0073

packing unit : 50 pieces

Front panel operation / screwdriver actuation



Coding	Switching function	Position	Indexing angle	with end stop	endless rotating
BCD	shorting	10 (0-9)	36°	07-4133	07-4033
	non-shorting	10 (0-9)	36°	07-4134	07-4034
BCD compl.	shorting	10 (0-9)	36°	07-4143	07-4043
HEX	shorting	16 (0-F)	22,5°	07-4153	07-4053
	non-shorting	16 (0-F)	22,5°	07-4154	07-4054
HEX compl.	shorting	16 (0-F)	22,5°	07-4163	07-4063
Gray code	shorting	16 (0-F)	22,5°	07-4173	07-4073


packing unit : 50 pieces

1 mm = 0.04 inch, 1 inch = 25.4 mm

Items available from stock!

Type 07 Vertical


With spindle-shaft



Coding	Switching function	Position	Indexing angle	with end stop	endless rotating
BCD	shorting	10 (0-9)	36°	07-3133	07-3033
	non-shorting	10 (0-9)	36°	07-3134	07-3034
BCD compl.	shorting	10 (0-9)	36°	07-3143	07-3043
HEX	shorting	16 (0-F)	22,5°	07-3153	07-3053
	non-shorting	16 (0-F)	22,5°	07-3154	07-3054
HEX compl.	shorting	16 (0-F)	22,5°	07-3163	07-3063
Gray code	shorting	16 (0-F)	22,5°	07-3173	07-3073

packing unit : 50 pieces

With spindle-shaft / with end stop / panel mounting / waterproof IP 68/2bar




Coding	Switching function	Position	Indexing angle	with end stop
BCD	shorting	10 (0-9)	36°	07-3133-300000
	non-shorting	10 (0-9)	36°	07-3134-300000
BCD compl.	shorting	10 (0-9)	36°	07-3143-300000
HEX	shorting	16 (0-F)	22,5°	07-3153-300000
	non-shorting	16 (0-F)	22,5°	07-3154-300000
HEX compl.	shorting	16 (0-F)	22,5°	07-3163-300000
Gray code	shorting	16 (0-F)	22,5°	07-3173-300000

O-Ring and nut supplied

packing unit : 50 pieces

With spindle-shaft / endless rotating / panel mounting / waterproof IP 68/2bar




Coding	Switching function	Position	Indexing angle	endless rotating
BCD	shorting	10 (0-9)	36°	07-3033-300000
	non-shorting	10 (0-9)	36°	07-3034-300000
BCD compl.	shorting	10 (0-9)	36°	07-3043-300000
HEX	shorting	16 (0-F)	22,5°	07-3053-300000
	non-shorting	16 (0-F)	22,5°	07-3054-300000
HEX compl.	shorting	16 (0-F)	22,5°	07-3063-300000
Gray code	shorting	16 (0-F)	22,5°	07-3073-300000

O-Ring and nut supplied

packing unit : 50 pieces

Screwdriver actuation



Coding	Switching function	Position	Indexing angle	with end stop	endless rotating
BCD	shorting	10 (0-9)	36°	07-2133	07-2033
	non-shorting	10 (0-9)	36°	07-2134	07-2034
BCD compl.	shorting	10 (0-9)	36°	07-2143	07-2043
HEX	shorting	16 (0-F)	22,5°	07-2153	07-2053
	non-shorting	16 (0-F)	22,5°	07-2154	07-2054
HEX compl.	shorting	16 (0-F)	22,5°	07-2163	07-2063
Gray code	shorting	16 (0-F)	22,5°	07-2173	07-2073

packing unit : 50 pieces